



# *Ultra* BOND

Tile Adhesives & Compounds

Complete solution for  
Construction chemicals



Product  
Catalogue



**W**e Unichem Industries Pvt.Ltd.. (An ISO 9001:2008 certified Company) started manufacturing in the year of 2000. Now we have manufacturing capacity of 50 mts per day. We are pioneer in manufacturing of Tile Adhesive, Tile Joint Powder, Tile Cleaner and other Cement based performance Adhesives, also wall putty .

We deliver the best quality products in the market. The offered ranges of products are known for their reliability, they are safe to use, lightweight, superior quality and have less maintenance. The vendors who are connected with us are selected after extensive market analysis on the basis of their past records, credibility, on-time delivery, quality and ethical business practices. Our vendors assure that the offered material is stringently checked on several defined parameters before the final delivery. Quality material helps our experts to manufacture superior quality products and offer the same to the customers at cost effective prices. Further, our quality analysts keenly examine the products under various parameters .

We have constructed sound and ultra-modern quality testing department that enable us to have superior quality to check on the products. Performing all our activities under the able guiding principles of our BOARD OF DIRECTORS, we have been successful in attaining heights in the market. Owing to his sound business insight, administrative qualities and valuable suggestions, we have positioned our name in the list of top notch organizations. Our company has made a policy for the superiority of products. As per the set policy and industrial guidelines, our quality analysts conduct quality checks on the whole assortment. Also, we have R&D Lab with full mechanized for quality checking and researching for new products. Further, we deliver our products at market leading prices and within a promised time frame



# Ultra BOND

## Tile Adhesives & Compounds

### Adhesives

Ultra Bond classic EX 320 .....	4
Ultra Bond premium EX 350 .....	4
Ultra Bond wall magic EX 390 .....	5
Ultra Bond gold EX 420 .....	5
Ultra Bond diamond Ex 450 .....	6

### Additives

Ultra Poly mix Rp3 .....	6
--------------------------	---

### Cleaners

Ultra clean tile cleaner C3 .....	7
Ultra shine cp fittings & sanitary cleaner C4.....	7

### Sealants

Ultra poxy EX 100 .....	8
Ultra poxy Guilt EX 130 .....	8
Ultra poxy Ex 100 colour chart .....	9
Ultra Bond joint filler EX 20 .....	10
Ultra Coat Cold Bitumen Emulsion .....	11
Ultra Bond Acrylic sealant EX 30 .....	11

### Water proofing

Ultra proof Ex 2000 .....	12
Ultra proof EX 4000 .....	13

### Levelling compound

Ultra level P 40 .....	14
Ultra wall Putty .....	15



Our basic product Ultra BOND classic EX 320 is a dry, one-component medium thick bed. It is a soft adhesive for fixing ceramic tiles, stoneware, vitrified tiles, and light weight construction materials, in interior floor areasonly

#### RECOMMENDED USE

This mortar is recommended only for most light interior residential floor applications

#### DIRECTION & INSTRUCTION FOR USE

Add 5 litter clean water with 20 kg of Ultra BOND classic EX 320 and stir well until a lump free compound is achieved. All surfaces must be clean and free from dust and other foreign matter that may affect adhesion. It is also free from grease and tar because it reduces the bonding ability of this product.

TECHENICAL DATA compliant with <b>Ultra BOND</b> classic EX 320 quality standard	
Appearance	Light grey ready mixed
Shelf life	12 months of the original packing in dry environment
Mixing water for use a slurry key	5L/1bag 20kg
Temperature range for application	From +5°C to 50°C
Adjustability	45mts
Foot traffic	24h
Grouting	After 24 hours
Interval before normal use	14 days
coverage	1bag = 20 kg/ 50 sqft in 3mm thickness

#### KEY BENEFITS

- Ready to use
- Economical
- Ideal for fixing ceramic tiles on floors
- Easy to install and clean

Available Pack Size :  
20 Kg, 10kg



Ultra BOND Premium EX 350 is an excellent polymer modified superior grade cementitious mortar. It can be used for installing small and medium size ceramic tiles, tiles on tiles, stoneware, vitrified tiles, and other construction materials, in interior floor and wall applications. It has excellent strength and bonding properties.

#### RECOMMENDED USE

Specially developed for all kind of interior floor & wall applications.

#### DIRECTION & INSTRUCTION FOR USE

Add 5 litter clean water with 20 kg of Ultra BOND premium EX 350 and stir well until a lump free compound is achieved. The surface to be tiled should be clean and sound. Old surfaces must be free from any kind of grease oils wax etc. At site addition of water shall be adjusted to attain desired consistency and mix thoroughly until a homogeneous paste is obtained. Allow tiling to set for 24 hours prior to filling joints.

TECHENICAL DATA compliant with <b>Ultra Bond Premium</b> EX 350 quality standard	
Appearance	Light grey ready mixed
Shelf life	12 months of the original packing in dry environment
Mixing water for use a slurry key	5L/1bag 20kg
Temperature range for application	From +5°C to 50°C
Adjustability	45 mts
Foot traffic	24h
Grouting	After 24 hours
Interval before normal use	14 days
Coverage	1bag = 20 kg/ 50 sqft in 3mm thickness

#### KEY BENEFITS

- Very easy to apply
- Dual purpose for wall and floor
- Suitable for tile on tile application
- Smooth and creamy
- Economical

Available Pack Size :  
20 Kg, 10kg





It is a factory made superior high polymer modified tile adhesive for installing small to large format wall tiles in both interior and exterior areas. It is mainly used for all kind of wall tiles. It can improve the clarity of tiles.

#### RECOMMENDED USE

Newly developed for wall tiles in interior & exterior applications.

#### DIRECTION & INSTRUCTION FOR USE

Add 5 litter clean water with 20 kg of Ultra BOND WALL magic EX 390 and stir well until a lump free compound is achieved. The surface to be tiled should be clean and sound. Old surfaces must be free from any kind of grease oils wax etc. At site addition of water shall be adjusted to attain desired consistency and mix thoroughly until a homogeneous paste is obtained. Allow tiling to set for 24 hours prior to filling joints.

TECHENICAL DATA compliant with <b>Ultra BOND</b> Wall magic EX 390 quality standard	
Appearance	White ready mix
Shelf life	12 months of the original packing in dry environment
Mixing water for use a slurry key	5L/1bag 20kg
Temperature range for application	From +5 °c to 50° c
Adjustability	45 mts
Foot traffic	After 24 hours
grouting	After 24 hours
Interval before normal use	14 days
coverage	1bag = 20 kg/ 50 sqft in 3mm thickness

#### KEY BENEFITS:

- Very easy to apply
  - Ideal for fixing tiles on walls
  - Free from thermal expansion
  - Non toxic
  - Water cleanup of un cured adhesive
  - High bond strength
  - Economical
- Available Pack Size :  
20 Kg, 10kg



It is polymer modified cement based quick set tile adhesive specially designed for heavy duty applicants for fixing vitrified tiles, slabs, natural stones and large size tiles on interior and exterior wall and floor surfaces. It is highly suggested for exterior areas, because it resists thermal expansion.

#### RECOMMENDED USE

Specially designed for interior & exterior floor & wall applications.

#### DIRECTION & INSTRUCTION FOR USE

Add 5 litter clean water with 20 kg of Ultra BOND gold EX 420 and stir well until a lump free compound is achieved. The surface to be tiled should be clean and sound. Old surfaces must be free from any kind of grease oils wax etc. At site addition of water shall be adjusted to attain desired consistency and mix thoroughly until a homogeneous paste is obtained. Allow tiling to set for 24 hours prior to filling joints.

TECHENICAL DATA compliant with <b>Ultra</b> Bond Gold EX 420 quality standard	
Appearance	Light grey ready mix
Shelf life	12 months of the original packing in dry environment
Mixing water for use a slurry key	5L/1bag 20kg
Temperature range for application	From +5 °c to 50° c
Adjustability	45 mts
Foot traffic	24hours
Grouting	24 hours
Interval before normal use	14 days
coverage	1bag = 20 kg/ 50 sqft in 3mm thickness

#### KEY BENEFITS:

- Temperature and chemical resistant
- Very good adhesion
- Non toxic
- Water cleanup of un cured adhesive
- Very easy to apply
- Dual purpose for wall and floor
- High bond strength
- Economical

Available Pack Size :  
20 Kg, 10kg



Ultra bond diamond EX 450 is polymer modified cement based white powder for multipurpose tile adhesive. It can provide outstanding bonding of tiles with cementitious surfaces.

#### RECOMMENDED USE

Recommended for tiles on tiles, swimming pools, white wall tiles, white floor tiles, white marbles, and glass bricks in interior & exterior applications.

#### DIRECTION & INSTRUCTION FOR USE

Add 5 litter clean water with 20 kg of Ultra BOND DIAMOND EX 450 and stir well until a lump free compound is achieved. All surfaces must be clean before use. Because the presence of foreign substances may affect adhesion.

TECHENICAL DATA compliant with <b>Ultra BOND</b> DIAMOND EX 450 quality standard	
Appearance	White ready mix
Shelf life	12 months of the original Packing in dry environment
Mixing water for use a slurry key	5L/1bag 20kg
Temperature range for application	From +5°c to 50°c
Adjustability	45 mts
Foot traffic	24 hours
Grouting	24 hours
Interval before normal use	14 days
coverage	1bag = 20 kg/ 50 sqft in 3mm thickness

#### KEY BENEFITS

- Ideal for interior and exterior purpose
- Very easy to apply
- Brilliant bind properties
- It is non shrink
- Fast and economical
- Free from thermal expansion
- White smooth & glossy finish



Available Pack Size :  
20 Kg, 10kg

Ultra poly mix rp3 is a water based polymer additive for use with all type of grouts suitable for use in interior and exterior applications including water tanks swimming pools etc. It gives extra strength, shining, also makes the surface fungus free.

#### RECOMMENDED USE

It can be used with all type of grouts

#### DIRECTION & INSTRUCTION FOR USE

Each 1 kg grout mix 100ml polymix rp3. Shake well before use. Clean away excess joint filers with suitable device immediately otherwise it removal is difficult. Make sure that the mixture is uniform. Strictly follow the ratio between additive and grout.

TECHENICAL DATA compliant with <b>Ultra Polymix Rp3</b> quality standard	
Appearance	White
Shelf life	12 months of the original packing
Mixing water for use a slurry key	mix 100 ml to 1kg grout
Temperature range for application	From +5°c to 50°c
Adjustability	1 hour
Foot traffic	3 hours
Grouting	not applicable
Interval before normal use	24 hours
Coverage	not applicable

#### KEY BENEFITS

- Extra strength
- Extra shining
- Durability and stain protection
- Very easy to apply
- Full finish of joints



Available Pack Size :  
100ml.





# Not Luxury But Necessary

## Ultra CLEAN TILE CLEANER

**C-3**

Ultra clean tile cleaner C3 helps to clean stains, rusts and other dirt from all types of tiles and glassware. It gives good results for cleaning water tanks and swimming pool floors.

### HOW TO USE

For normal cleaning take ultra clean tile cleaner C3 and water in 1:2 ratios take it in a plastic bucket or similar vessels for extra power to use ultra clean and water in equal proportion

### Precaution

1. Use hand gloves while cleaning.
2. Protect your eyes and skin from ultra clean tile cleaner C3
3. Don't use it to clean marble and granite
4. Store it at room temperature
5. Keep it away from children

TECHNICAL DATA compliant with <b>Ultra Clean</b> quality standard	
Appearance	clear
Shelf life	12 months of the original packing in dry environment
Mixing water for use as a slurry key	1:4

Packing:

500ml ultra clean x 20 numbers in one

Shelf life :  
12 months of the original packing  
in dry environment



## Ultra shine

CP FITTINGS & SANITARY CLEANER C4

Ultra shine CP fittings & sanitary cleaner C4 helps to clean stains, rusts and other dirt from all types of CP fitting and sanitary items.

### How to use

For normal cleaning take Ultra shine CP fittings & sanitary cleaner C4 and water in 1:2 ratios take it in a plastic bucket or similar vessels for extra power to use ultra clean and water in equal proportion.

### Precaution

1. Use hand gloves while cleaning.
2. Protect your eyes and skin from ultra shine C4
3. Don't use it to clean marble and granite
4. Store it at room temperature
5. Keep it away from children

TECHNICAL DATA compliant with <b>Ultra Shine</b> quality standard	
Appearance	clear
Shelf life	12 months of the original packing in dry environment
Mixing water for use as a slurry key	1:4

Packing:

500ml ultra shine x 20 numbers in one

Shelf life :  
12 months of the original packing  
in dry environment





Available Pack Size :  
1 kg, 5kg

**Ultrapoxy EX 100** is a three compound stain free grout for floor and walls. It is a chemical resistant grout for complete finishing of your floors and wall joints. It provides strong adhesion to tiles and it is strong water repellent.

### RECOMMENDED USE

To suit your individual concrete repair and joint filling needs. It can be used for both internal and external purpose. It can be mainly used in kitchens bathrooms water bodies, operation theatre, sterilisation rooms etc.

### DIRECTION & INSTRUCTION FOR USE

#### surface Preparation

Before grouting , remove excess adhesive & debris from tile joints clean the tile surface with a damp sponge to remove dirt, dust, adhesive and stains

### HOW TO MIX

Pour the contents of part A and Part B in to a clean bucket Mix Part A & Part B thoroughly for one minute with a trowel. Add at least 3/4th of contents of part C Filler Powder and mix , Add resin Powder slowly if required, to achieve required consistency

### HOW TO APPLY

fill the tile joint with the ULTRA PROXY EX 100 stain free grout with the putty blade. Holding the putty blade float perpendicular to the tiled surface, remove excess grout by drawing the putty blade across the surface at 45 degree to the grouted joints. Be sure to pack all joints full



Available Pack Size :  
1 kg, 5kg

### KEY BENEFITS

- Very easy to apply
- Water resistance
- Easy to compact and fill joints
- Strong and durable
- Uniform colour
- Non toxic
- Anti bacterial and anti fungal

**Ultra poxy Gloss EX 130** is a three compound 100% solid stain free epoxy grout for floor and walls. It is specially designed to enhance aesthetics and performance. It is a chemical resistant grout for complete finishing of your floors and wall joints with a glossy shine. It provides strong adhesion to tiles and it is strong water repellent.

### RECOMMENDED USE


To suit your individual concrete repair and joint filling needs. It can be used for both internal and external purpose. It can be mainly used in kitchens bathrooms water bodies, operation theatre, sterilisation rooms etc.

TECHNICAL DATA compliant with <b>Ultrapoxy</b> EX 100 & EX 130 quality standard	
Appearance	As per colour required
Shelf life	24 months of the original packing in dry environment
Mixing water for use a slurry key	No water required
Temperature range for application	From +5°C to 50°C
Adjustability	2 hours
Foot traffic	2 hours
Grouting	Not applicable
Interval before normal use	24 hours
Coverage	Depend on tile size and joint width





Strong & Durable  
100% Stain Free  
Anti Fungal  
Anti Bacterial

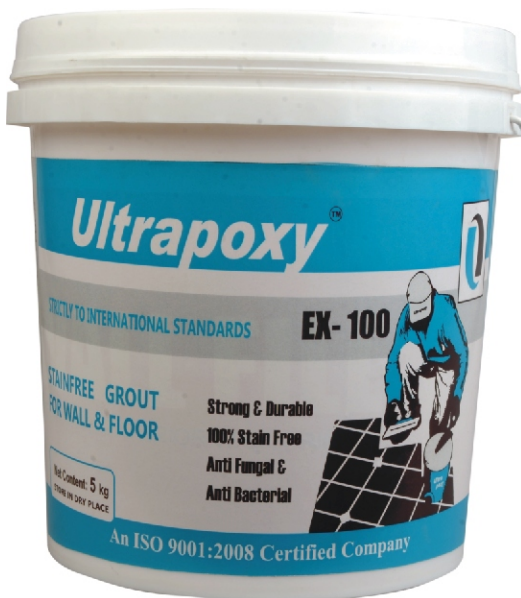

## Ultrapoxy COLOUR CHART

	White
	Ivory
	Pink
	L.green
	Cream
	Grey
	Red Brown
	D.brown
	DGREEN
	Magenta
	Alphine Blue
	Black
	Burgundy
	Orange
	Red
	Yellow
	Teak Wood
	Aqua Green
	Mint Green
	D.blue
	C.brown
	Almond
	Mushroom
	T. Cota
	L. Blue
	Jaiselmer



It is excellent water resistant, superior grade, highly polymerized tile grout. It is very easy to clean and a superb working property means less wastage and a better finish. Suitable for walls and floors for exterior and interior tiling. For improved performance use mix with polymix rp3

### **RECOMMENDED USE**

For grouting of wall and floor joints, glass and natural stones, stoneware tile and structural glass bricks.

### **DIRECTIONS**



### **KEY BENEFITS**

- It offers excellent colour uniformity.
- Durability and stain protection.
- Water and weather resistant.
- Very easy to apply.
- Full finish of crack free joints.

Available Pack Size :  
500gm, 1 kg.

## FOR STAINFREE JOINS OF TILES

### ULTRA BOND TILE JOINT FILLER COLOUR CHART

	White
	Ivory
	Pink
	L.green
	Cream
	Grey
	Red Brown
	D.brown
	DGREEN
	Magenta
	Alphine Blue
	Black
	Burgundy
	Orange
	Red
	Yellow
	Teak Wood
	Aqua Green
	Mint Green
	D.blue
	C.brown
	Almond
	Mushroom
	T. Cota
	L. Blue
	Jaiselmer



## Ultra coat

### COLD BITUMEN EMULASION

Ultra cold bitumen emulsion is an emulsified thixotropic water based bitumen protective coating. It is specially used for providing waterproofing for under ground concrete structures and as the protective coating for roofing systems and other exposed surfaces. When dried it forms a black flexible protective film and it provides a tough barrier to vapor transmission. It gives resistance to chloride and sulphate attack that are present in the soil. It adheres to concrete, wood metal etc.

#### Instruction for use:

All surfaces to be coated should be sound and thoroughly clean before Ultra Bitumen coat is applied. Remove all dust, dirt, rust, oil, grease and any loose particle, which may effect the adhesion of the coating with the substrate. Application can be done with roller, brush, airless spray. Mix the content of the drum or pail thoroughly before application. Apply ultra coat on the substrate at the thickness of 125 microns. Further coats shall be applied only after the previous coat is completely cured. A prime coat is recommended before the application of the first coat. A Prime coat is recommended before the application of the first coat. The primer coat can be made by diluting the same ultra coat bitumen emulsion with 20% water.

TECHENICAL DATA compliant with <b>Ultra Coat COLD BITUMEN EMULASION</b> quality standard	
Appearance	Black
Shelf life	12 months of the original packing in dry environment
Mixing ratio	direct use
Temperature range for application	+5°C to 50°C
Adjustability	3 hours
Coverage	50 sqft per kg



Available Pack Size :  
20L & 5L

## Ultra Acrylic Sealant

Ultra Acrylic Sealant is a single component acrylic sealant specially designed for pointing on all common building surface. Which when curing forms a flexible seal which can accommodate moisture and thermal movements with minimal shrinkage. It is highly elastomeric and gives excellent adhesion to most building substrates like metal, aluminium etc. Ultra Acrylic Sealant is a ready to use sealant. No mixing is required. It can be used without primer in new substrates.

#### Instruction for use:

All surface or cracks and joint edges, to be applied, must be clean, dry and free from dirt, dust oil, grease or any loose particles. When applied on glazed surfaces like ceramics etc

TECHENICAL DATA compliant with <b>Ultra ACRYLIC SEALANT EX 30</b> quality standard	
Appearance	As per requirement
Shelf life	12 months of the original packing in dry environment
Mixing ratio	direct use
Temperature range for application	+5°C to 50°C
Adjustability	3 hours
Coverage	40 sqft per kg



Available Pack Size :  
20L & 5L



Very easy to apply  
100% water repellent  
Strong and durable

# WATER PROOFING SOLUTION

**Ultraproof**

**LEAK PROOF SOLUTION EX 2000**

Ultra PROOF LEAK PROOF SOLUTION EX 2000 is newly developed formula based on acrylic cementitious protective coating for water proofing of RCC Roofing and bathrooms. It forms seamless, durable membranes with excellent water proofing protection. It is an environment friendly .non toxically water proof coating provides strong adhesion.

## RECOMMENDED USE

RCC Roofing, Bathroom floor and Walls

Basement retaining walls.

Pile Heads.

Structural surfaces of cellars.

Concrete roof slabs, floors, balcony floor slabs.

Water tanks and swimming pools.

Bridge decks.

Canals and dam walls.

Structural surfaces of dykes.

Waterproof coating (bottom coat)

for marble, granite and other natural stones.

Suitable for steam room waterproofing.

Sewage treatment plants.

for special applications such as areas where more thick plaster application is needed.

## Features & Benefits

Flexibility - Provides a flexible & low permeable coating.

Water permeability - Excellent resistance to ingress of water.

Slip resistant - Provides slip resistant coating.

Waterproof - Waterproof for concrete structures.

Adhesion - Excellent adhesion to concrete, natural and artificial stone.

Diffusion - Excellent resistance to chloride ion diffusion and carbon dioxide.

Low temperature resistant - Resistance to freeze-thaw cycles and de-icing salts.

Carbonation - Prevents carbonation of cement concrete.

## Method of Application

### 1 SURFACE PREPARATION

The surface must be strong & free from dirt, dust & loose particles. Thoroughly wire brush the surface & clean the dust by air compressor or wash the surface with water. Oil & grease must be removed using degreasing solvents.

Any damaged surface must be repaired by using polymer modified repair mortar.

### 2 MIXING

Shake well the liquid component to a homogenous milky colour, before mixing transfer entire quantity of liquid component into a suitable clean mixing vessel, gradually start addition of powder component under

constant mixing with a stirrer using a pneumatic or electric power tool (1kw) at slow speed at 250 – 300 rpm For 3- 5 minutes to a homogeneous & uniform free flowing slurry.

TECHENICAL DATA compliant with <b>Ultraproof</b> Leak Proof Solution EX 2000 quality Standard	
Appearance	Grey and white
Shelf life	12 months of the original packing in dry environment
Mixing ratio	1:3 liquid and powder
Temperature range for application	+5°C to 50°C
Adjustability	3 hours
Coverage	60 sqft per kg

Available Pack Size :  
**15 kg, 3 kg.**





Ultra PROOF LEAK PROOF SOLUTION EX 4000 is newly developed formula based on acrylic protective coating for water proofing of RCC Roofing, Bathroom floor and Walls, Basement retaining walls, Pile Heads, Structural surfaces of cellars, Concrete roof slabs, floors, balcony floor slabs, Water tank and swimming pools, Bridge decks, Canals and dam walls, Structural surfaces of dykes, Water proof coating (bottom coat) for marble, granite and other natural stones, Suitable for steam room waterproofing, Sewage treatment plants. It forms seamless, durable membranes with excellent water proofing protection. It is an environment friendly, non-toxic water proof coating provides strong adhesion.

#### How To Use

Terrace waterproofing is a very critical area as it is always exposed to harsh weather conditions, climatic changes and rains. The terrace surface tends to accumulate rain water which in due course starts seeping inside the slab. Over time the deterioration of the surface will increase leading to more damage.

Following areas need to be given special attention while waterproofing

- Pipes running over the roof or parapet wall
- Electric wires or cables conduits
- Rain water drain outlets with proper size and number
- Threshold at the stair case door
- Water tank, dish antenna, split AC unit bases

During surface preparation an important thing is the fitting of drain outlets.

Very easy to apply  
100% water repellent  
Strong and durable

TECHNICAL DATA compliant with <b>UltraProof</b> Leak proof solution EX 4000 quality standard	
Appearance	white liquid
Shelf life	12 months of the original packing in dry environment
Mixing water for use as a slurry key	not applicable
Temperature range for application	+5°C to 50°C
Adjustability	3 hours
Foot traffic	24 hours
Interval before normal use	24 hours
Coverage	10 sq ft per Ltr.



Available Pack Size :  
20 kg, 10 kg.





**Ultra bond**

**Self Leveling Compound EX-505**

Very easy to apply  
100% water repellent  
Strong and durable

#### Mix the Self Leveling Compound

In the mixing drum, add 9 of 10 parts (90%) of the water required to mix the compound according to the directions on the compound bags. 2 bags of compound will level an average garage floor. Attach the mixing paddle to the power drill and turn it on. Have your assistant pour the compound mix into the mixing drum slowly to avoid lumps. Mix up only as much compound as you can apply in 20 to 30 minutes. Once the compound is evenly blended, add the remaining water slowly as you may not need it all. Continue stirring with the paddle for 2 more minutes to smooth the self leveling compound.

#### Pour the Self Leveling Compound

Pour the self leveling compound onto the concrete in long thin strips about 12 inches wide. Start at the farthest edge from your exit doorway and work toward that exit.

Proceed to Part 2 to continue. You will learn how to spread the compound, mix more compound to complete the task, about drying times and how to lightly sand to create the best finish.

TECHENICAL DATA compliant with <b>Ultra bond self leveling compound</b> EX 505 quality standard	
Appearance	grey
Shelf life	12 months of the original Packing in dry environment
Mixing water for use a slurry key	1:9
Temperature range for application	+5°C to 50°C
Adjustability	3 hours
Foot traffic	3 hours
Interval before normal use	3 hour
Coverage	50 sqft per 20 kg



# Ultra Bond

## WALL PUTTY

SUPERIOR GRADE

Very easy to apply  
100% water repellent  
Strong and durable

Imagine an elegant and modish home, styled to every corner with simplicity. Each element is detailed into, apart from the walls inside. The beauty and elegance of this wall could be ruined by flaking which not only leaves a blemish on the wall but also a scar in your mind. With application of Ultrabond Wall Putty, you can leave these worries behind! Ultra Bond Wall Putty is a pre-paint base coat with unique formulation and water resisting properties, preventing flaking of your expensive wall paints.

Applying two coats of Wall Putty before painting, not only prevents flaking, but also makes it durable. Moreover, it adds to the sheen of the painted surface. As a white cement-based putty, it binds strongly with the base plaster, even if the surface is damp and forms a protective base. It fills up the fine pores in the walls and ceilings, giving you a smooth and dry surface for painting.

### APPLICATION RECOMMENDATION

Apply Only on cement concrete/ cement plastered surfaces.  
Remove all dust/ loose particles from the surface before application of ultra bond wall putty

Mix ultra bond wall putty powder with water for desired consistency  
idealy two coats with a maximum thickness of 1.5-2.5 mm are required for a smooth finish.

apply second coat only after the first coat is completely dry  
Store the bag in a dry place and open only just before use



Available Pack Size :  
20 kg, 40 kg.

### TECHENICAL DATA compliant with **Ultra Bond** Wall Putty quality standard

Appearance	white
Shelf life	12 months of the original packing in dry environment
Mixing water for use a slurry key	3:1
Temperature range for application	+5°C to 50°C
Adjustability	3 hours
Coverage	1kg 20 sq ft





Manufactured by :

**UNICHEM INDUSTRIES PVT.LTD**

Mudur (P.o) Vattamkulam, Pin: 679578, Kerala

Info@unichemindustries.com | www.unichemindustries.com

Customer Care: 1800 425 33 50

---

Marketed By

**MOTIF BUILD WARE**

Chotty Chittady P.o, Kottayam Dt., 686512

Ph: 9995869057, 8589827878

motifbuildware@gmail.com

**An Iso 9001: 2008 Certified Company**